
Halifax Sailing & Watersports Club

Locking the top gate




Make sure the lock bar goes through the big hole in the 2 lock link.

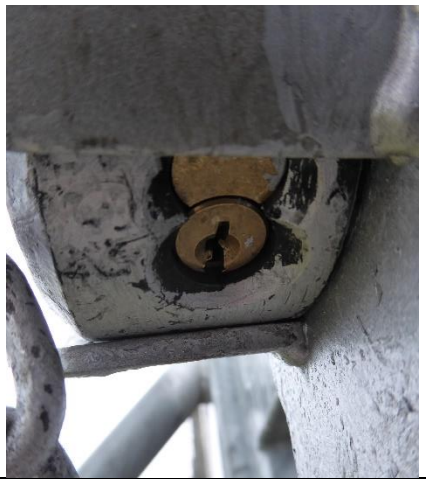

Make sure the lock pin goes through the lock bar and is fully up and locked in position

Lock parts on correctly locked gate

1) Lock bar
2) Screw rod (pointing in)
3) 2 lock link
4) Gate Rod
5) Guide blocks
6) Yorkshire Water lock

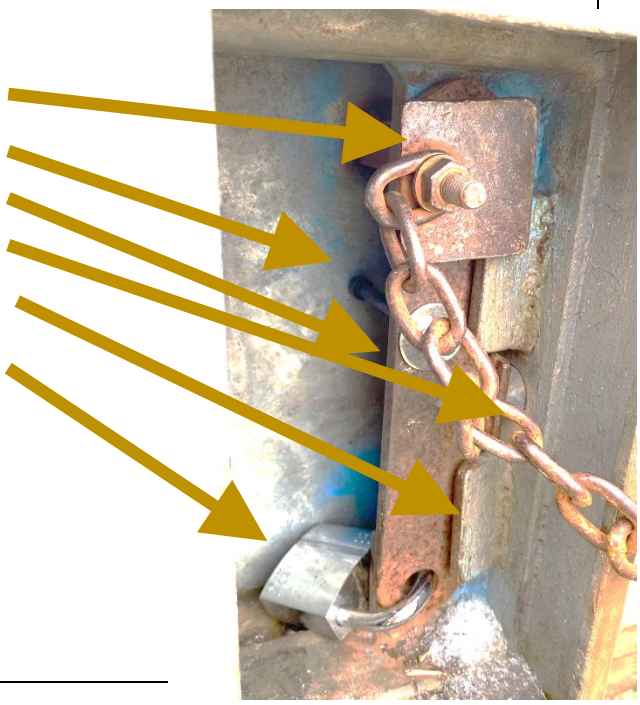

Gate Opening Procedure



1) Open lock, pull lock pin down, remove lock from lock bar.



2) Remove lock & lock bar from gate



3) Open gate rod (this will move the 2 lock link in the steel box away from the gate post).
4) Lock the lock back on the lock bar. (To stop people taking the lock barrel and getting a key made.)

Gate Closing procedure:

1) Unlock & separate lock and lock bar.
2) Shut the gate and slide the gate rod into the gate post.
3) Put the 2 lock bar up to the gate bar hole, which is in the steel box. (The big hole at the top should be lined up with the hole to the back of the gate, and the 2 lock bar should be in the two guide blocks and the screw rod on the inside, not facing out.
4) Put the lock bar through the big holes in the double lock bar and the gate to go out of the back of the gate.
5) Put the lock on the lock bar and lock it. Make sure the lock pin is fully up and locked before taking the key out. The lock will be below the surface of the lock.

The top gate lock is the same as other locks for gates, the club & generator, locked & opened with the standard gate key.

This has kept us safe from 2018, please let me know if you come up with a better method or these instructions can be improved.

.

William Redman